


# CD 100

CAPACITOR DISCHARGE  
STUD WELDER

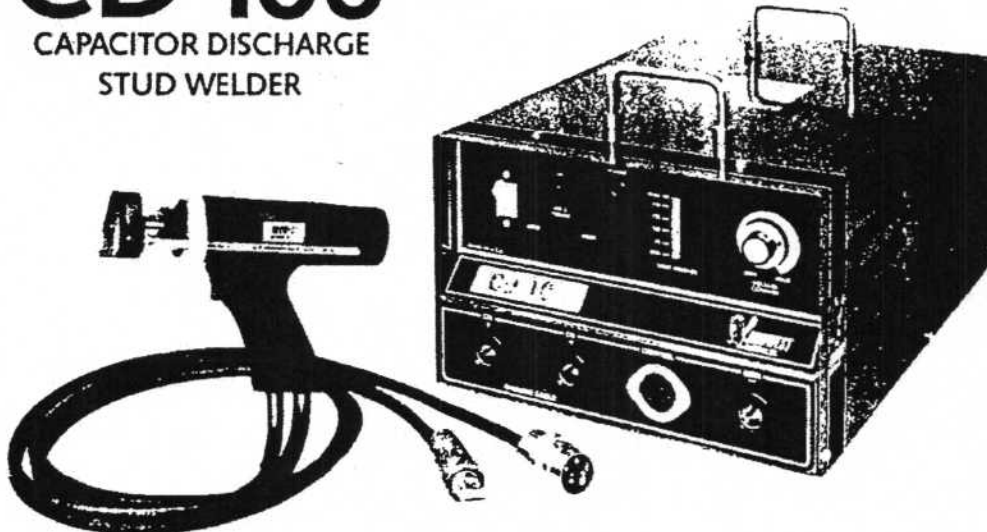

The CD100 Capacitor Discharge Stud Welder from Midwest Fasteners is one of the most powerful units on the market today. With solid state design, the CD100 is perfectly matched to heavy-duty industrial fastening for welding larger diameter CD studs.

Not only can the CD100 weld materials such as mild steel, stainless steel, aluminum and brass — the unit is also capable of welding studs up to 3/8" diameter. Due to the speedy capacitor discharge process, studs can be welded to materials as thin as .015" without burning through.

The CD100 comes equipped with a high/low power range switch that is helpful in welding small and large diameter fasteners. This variable capacitance switch allows the operator to fine tune critical applications from 84,000 to 168,000 MFD. Another unique feature of the CD100 is the LED panel meter, which displays capacitor discharge voltage at a glance.

Solid state circuitry and rugged steel chassis assure durability and long service life. What's more, the unit is loaded with safety features. Circuit breaker protection prevents expensive repair to component parts, such as printed circuit board. The recessed control panel protects gauges and control knobs. And the auto fault shut off aids in operator safety.

An ultra-light 24 ounce "Precision Contact Gun" is included with the CD100 welding system. With this gun, operator fatigue is reduced — thereby increasing production. The CD100 contact gun also includes interchangeable main spring pressure that is necessary for many special welding applications, and critical in welding aluminum fasteners and dissimilar materials.

## NEW-AGE FASTENING SYSTEMS, INC.

Studwelding Equipment, Fasteners & Supplies

Boiler Outage Specialists

Jobsite Studwelding Division

P.O. Box 5658, Deptford, NJ 08096

Phone: (856) 218-8301


Fax: (856) 218-8305

Toll Free: (888) 889-3833

steve@newagestudwelding.com

All information contained herein subject to change without notice.

# CD 100 CAPACITOR DISCHARGE WELDING SYSTEM

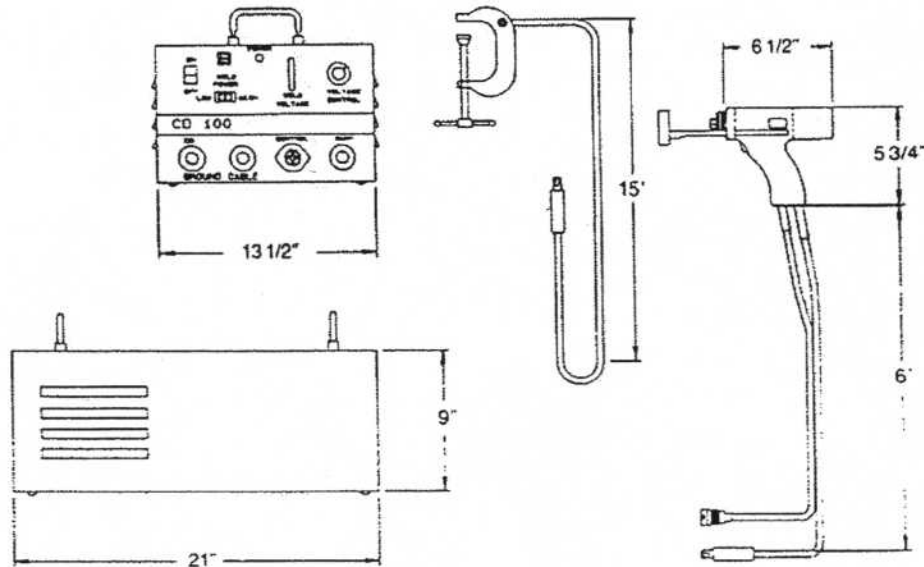

## SPECIFICATIONS:

### POWER SUPPLY/CONTROLLER

Height	9"
Width	13-1/2"
Depth	21"
Weight	66 Pounds
Capacitance	Low - 84,000 mfd High - 168,000 mfd
Weld Rate	14/Min.
Weldable Materials	Mild Steel, Stainless Steel, Aluminum
Pin/Stud Range	14 Ga. thru 3/8" Dia.
Weld Voltage	35-175 VDC
Weld Mode	Contact
Power Requirement	115VAC, 60 Hz, 30 Amp

### WELD GUN (CD-2P PRECISION)

Weight	1-1/2 Lbs. (Not including cable)
Size (LWH)	6-1/2" x 2" x 5-3/4"
Weldable Dia.	14 Gauge through 3/8" Dia
Material	High strength, impact resistance, polycarbonate

### CABLES

Ground Cable	#1 x 15 Ft. (two each)
Extension Set	#1 x 18/2 x 25 Ft. (one each)

# NEW-AGE

## FASTENING SYSTEMS, INC.

Studwelding Equipment, Fasteners & Supplies

Boiler Outage Specialists

Jobsite Studwelding Division

P.O. Box 5658, Deptford, NJ 08096

Phone: (856) 218-8301

Fax: (856) 218-8305

Toll Free: (888) 889-3833

steve@newagestudwelding.com

All information contained herein subject to change without notice.