



CD 80

CAPACITOR DISCHARGE
STUD WELDER

The CD80 from Midwest Fasteners is a medium-sized Capacitor Discharge Stud Welding System designed specifically for the OEM industry. This system's solid state design and modular construction promises dependability, versatility, portability and long service life.

The CD80 welds materials such as mild steel, stainless steel, aluminum and brass. The capacitor discharge process is so fast that studs can be welded to materials as thin as .015" without burning through. What's more, the CD80 is powerful enough to weld fasteners from 14 gauge through 5/16" diameter. It operates on standard 120 Volt AC incoming power and features stepless weld voltage control. A 220 Volt AC "Export" system is also available.

The unit's solid state circuitry means greater dependability and lower maintenance costs, since moving parts are eliminated. And the rugged steel chassis

makes the CD80 able to withstand typical construction jobsite environments. Gauges and control knobs are protected by a recessed control panel. The auto fault shut off helps guard operator safety, and the panel meter displays capacitor discharge voltage at a glance. Another safety feature, circuit breaker protection, prevents expensive repair to component parts, such as printed circuit board.

Midwest Fasteners includes an ultra-light 24 ounce Precision Contact Gun with the CD80. With this Contact Gun, operator fatigue is reduced — thereby increasing production. Interchangeable main spring pressure is also featured on the CD80 contact weld gun. This feature is critical in welding aluminum fasteners and dissimilar materials, and is necessary in many special welding applications.

NEW AGE
FASTENING SYSTEMS, INC.

Studwelding Equipment, Fasteners & Supplies

Boiler Outage Specialists

Jobsite Studwelding Division

P.O. Box 5658, Deptford, NJ 08096

Phone: (856) 218-8301


Fax: (856) 218-8305

Toll Free: (888) 889-3833

steve@newagestudwelding.com

All information contained herein subject to change without notice.

CD 80 CAPACITOR DISCHARGE WELDING SYSTEM

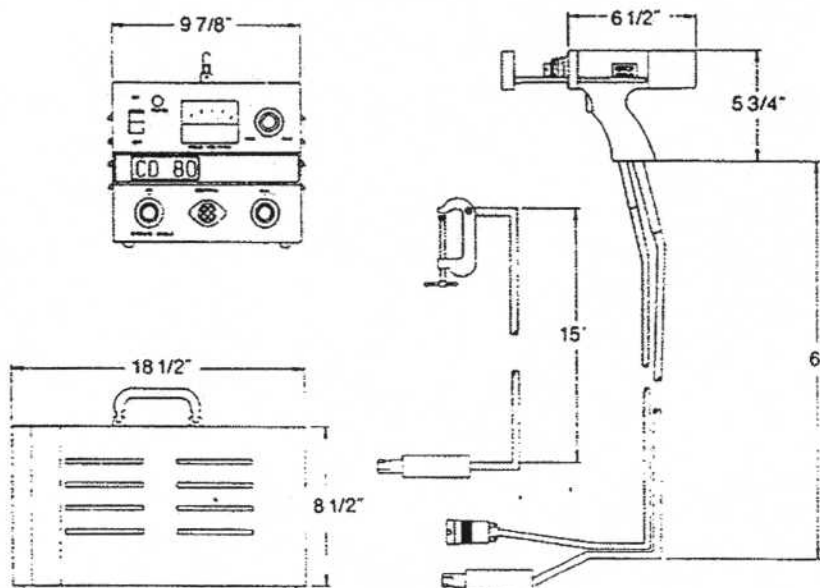

SPECIFICATIONS:

POWER SUPPLY/CONTROLLER

Height	8-1/2"
Width	9-7/8"
Depth	18-1/2"
Weight	58 Pounds
Weld Rate	20/Min.
Weldable Materials	Mild Steel, Stainless Steel, Aluminum
Pin/Stud Range	14 Ga, thru 5/16" Dia.
Weld Voltage	35-175 VDC
Capacitance	98,000 Mfd
Weld Mode	Contact
Power Requirement	115VAC, 60 Hz, 20 Amp

WELD GUN (CD-2P PRECISION)

Weight	1-1/2 Lbs. (Not including cable)
Size (LWH)	6-1/2" x 2" x 5-3/4"
Weldable Dia.	1/8 through 5/16" Dia.
Material	High strength, impact resistance, polycarbonate

CABLES

Ground Cable	#1 x 15 Ft. (one each)
Extension Set	#1 x 18/2 x 25 Ft. (one each)

NEW-AGE

FASTENING SYSTEMS, INC.

Studwelding Equipment, Fasteners & Supplies
 Boiler Outage Specialists
 Jobsite Studwelding Division
 P.O. Box 5658, Deptford, NJ 08096
 Phone: (856) 218-8301
 Fax: (856) 218-8305
 Toll Free: (888) 889-3833
 steve@newagesstudwelding.com

All information contained herein subject to change without notice.