


SELF-LOCKING WASHERS (Round)

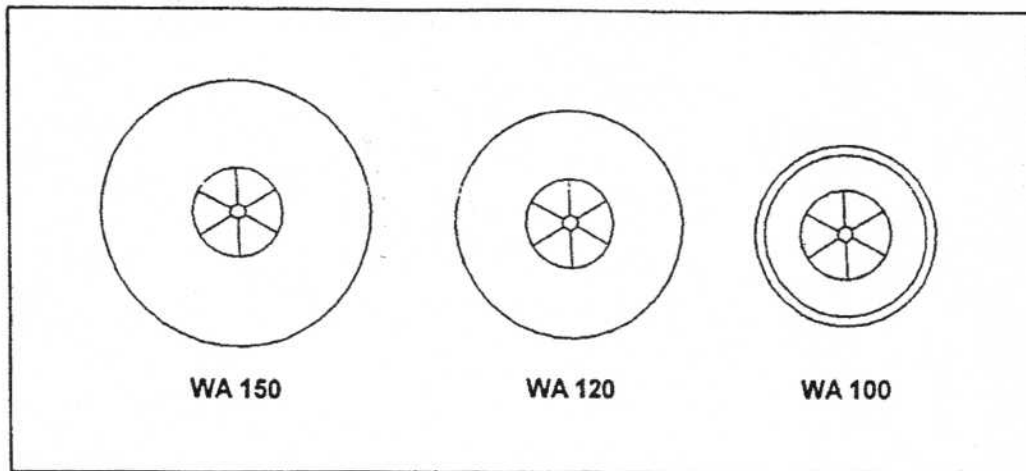

Type	WAMS-150 M.S. WASS-150 S.S. WAAL-150 AL.	WAMS-120 M.S. WASS-120 S.S. WAAL-120 AL.	WAMS-100 M.S. WASS-100 S.S. WAAL-100 AL.
Diameter	1-1/2"	1-3/16"	1"
Thickness	.015 nom.	.015 nom.	.015 nom.
Material	Mild Steel	Mild Steel	Mild Steel
Plating	Galv.	Galv.	Galv.
Edges / flat or beveled	beveled	flat	beveled
Other materials available	Alum., S.S.	Alum., S.S.	-
Packaged per carton	1000	1000	1000
Shipping weight per 1000	8 lbs.	6 lbs.	4 lbs.

MIDWEST FASTENERS Self-Locking Washers are used in conjunction with MIDWEST FASTENERS weld pins, insul-anchors and lacing anchors to fasten insulation in place. Simply press the self-locking washer onto the pin up against the insulation until the desired position is reached and then clip off, or bend over, the remaining portion of pin for a permanent attachment.

The choice between Round or Square self-locking washers is basically a matter of aesthetics or personal

preference. The domed, multi-lanced hole design provides for ease of locating washer on pin and positive self-locking. Some styles of washers are manufactured with a beveled edge to prevent the washer from cutting into the insulation facing.

MIDWEST FASTENERS Self-Locking Washers are available according to the chart above and with standard 10 GA, 12 GA, or 14 GA hole sizes off-the-shelf. Other material/plating combinations and hole sizes are available by special order.

TO ORDER OR SPECIFY GIVE:

1. Product Code WA
2. Material MS, SS, AL
3. Type 150, 120, 100
4. Diameter of pin/stud on which washer is to be used



Studwelding Equipment, Fasteners & Supplies
 Boiler Outage Specialists
 Jobsite Studwelding Division
 P.O. Box 5658, Deptford, NJ 08096
 Phone: (856) 218-8301
 Fax: (856) 218-8305
 Toll Free: (888) 889-3833
 steve@newagestudwelding.com

All information contained herein subject to change without notice.