


NON FLANGED

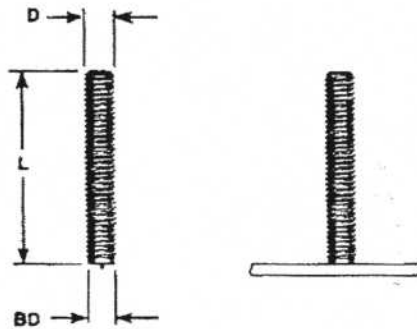

D	STUD	
	MAX BD	MIN L
4-40	.116	.250
6-32	.142	.250
8-32	.168	.250
10-32	.194	.250
10-24	.194	.250
1/4-20	.252	.375
5/16-18	.315	.500

MATERIAL: LOW CARBON STEEL C - 0.23% max. P - 0.04% max. Mn - 0.90% max. S - 0.05% max.	STAINLESS STEEL AISI grade - 302/304/305 std. Other grades available upon request.
MECHANICAL PROPERTIES: Tensile 60,000 psi (min.) Yield 50,000 psi (min.) Elongation 20% (in 2 inches)	Values for various grades available upon request.
PLATING: Copper coating is standard.	Does not apply to Stainless
ANNEALING: Studs are annealed where required.	Studs are annealed where required.
MATERIAL: ALUMINUM Alloy — 1100 & 5000 series std. Other alloys available upon request.	BRASS Alloy — (lead free) 70-30 std. Other alloys available upon request.
MECHANICAL PROPERTIES: Values for various alloys available upon request.	Values for various alloys available upon request.

TO ORDER OR SPECIFY GIVE:

1. Product Code CD NF
2. Diameter D
3. Length L
4. Material



Studwelding Equipment, Fasteners & Supplies
 Boiler Outage Specialists
 Jobsite Studwelding Division
 P.O. Box 5658, Deptford, NJ 08096
 Phone: (856) 218-8301
 Fax: (856) 218-8305
 Toll Free: (888) 889-3833
 steve@newagestudwelding.com

All information contained herein subject to change without notice.